




JONO's design is using Three-dimensional stepped screen, Trommel screen, Flip-flow screen, High pressure density separator and etc. as the main equipment of treating landfill waste. Through that, aggregate can be separated out and used for foundation pit backfill, land reshaping, municipal road laying. the humus soil separated out can be used for mountain repair, landscaping, lightweight material can be used for raw materials of refining and RDF or auxiliary fuel burning. After fine sorting, more than 90% high purity waste plastic film was obtained through further cleaning and desorption, which was used as raw material for granulation.

LANDFILL WASTE



Landfill waste comes from household waste. With natural biodegradation of organic matter, landfill waste in anaerobic environment will produce toxic flammable gas such as hydrogen sulfide, and methane. Illegal landfill that without seepage prevention also has risk of contaminating soil and polluting groundwater problems

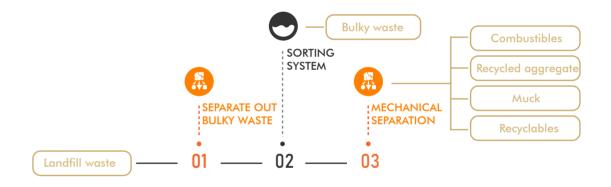

The details are subject to the actual situation of the material. It is for reference only.





SUZHOU JONO ENVIRONMENTAL ENGINEERING CO., LTD.

yz@jonogroup.cn



+86 15895500271



https://jonochina.com/ +86 0512-86668089

